

Murata Wiedemann®

catalog



**MATRIX**  
Tooling for Punch Presses



# MURATA WIEDEMANN® CATALOG MATRIX



# INDEX

	BASIC CONCEPTS	
5	• PUNCHES	
5	• STRIPPERS AND GUIDES	
5	• DIES	
5	• SPECIAL TOOLING	
6	• MATERIAL HARDNESS	
6	• MATERIAL THICKNESS IN RELATION TO HOLE DIAMETER	
6	• ROUNDING OFF AND SMOOTHING	
6	• THE MACHINE OPERATOR	
7	CLEARANCE CALCULATION AND CONTROL (EXCESSIVE OR INSUFFICIENT CLEARANCE RESULT)	
8	PUNCHING STRAIN AND RELATED CALCULATIONS	
8	WHISPER SHARPENING - USE AND BENEFITS	
9	SURFACE COATINGS - USE AND BENEFITS	
9	PROCESSING ON DEMAND	
10	SHAPES CODING	
14	Series 114	A Station
15	Series 114	B Station
16	Series 114	C Station
17	Series 114	D Station
18	Series 114	E Station
19	Series 114	F Station
20	Series 114	G Station
21	Series 114	H Station
22	SHEAR GRINDING FIXTURE	
24	TOOL HOLDER CART	
25	TOOLS	
27	TOOLS CODING	
28	COMPANY PROFILE	



## BASIC CONCEPTS

For over 20 years **MATRIX** has been manufacturing tooling for working metal sheet, availing of highly qualified technicians who constantly update their knowledge about the different needs of the production cycle.

**MATRIX** also invests in best technologies: from sophisticate software for projecting to the computerization of productions data, from planning to the final tests of the products.

All this allows our company to reach a high qualitative standard, certified by the system **ISO 9001:2000** and to obtain fast delivery times even for special tooling supplies.

### **PUNCHES**

Punches are manufactured in accordance with the most modern processes, as well as using a single type of steel (M2), and with their high vacuum thermal treatment they guarantee the best performances on all types of material; this performance could be further improved by the most modern surface coatings of TiAlN micro layer. Matrix ensures the maximum care in dimensional and axial concentric accuracy, as well as in the roughness of the cutting part to guarantee its longer life.

### **STRIPPERS AND GUIDES**

These tools are manufactured with steels that are resistant to both wear and the greatest stresses, and are produced with the strictest tolerances to guarantee long life to the punches and punch press turrets; all guides are hardened to 60 HR<sub>c</sub> and, where possible, are provided with large lubrication channels.

### **DIES**

Full automatic production cycles guarantee the quality standard of our dies which are manufactured with certified steel (D2), as well as having high vacuum treatment.

All possible technologies are employed to discharge cyclical tensions, as well as to avoid scraps reclimbing through the use of proper manufacturing geometry. Dies, which are tested with computerized systems and with hourly frequency, guarantee a very high reliability level.

### **SPECIAL TOOLING**

Considering the continuous requests of special tooling, **MATRIX** takes particular care of such a sector.

Our technical department, in short time, is able to give solutions, quotations and delivery times which are getting more and more close to the standard tooling ones.

Each special tool is coded in order to allow us an easy and quick tracking down during all its working phases, from design to testing.

## BASIC CONCEPTS

### MATERIAL HARDNESS

Punching is usually carried out on mild or low alloy steel. On material with a higher resistance there are difficulties, and the processing requires special punches which however sustain a greater wear.

In any case, the maximum load necessary to execute punching must be definitely lower than the punch maximum resistance to compression (*see tonnage calculation formula on page 8*).

The maximum compression load that the punch can tolerate depends on the type of steel and its hardness. For instance, an hardened steel for tools resistant to collisions can tolerate a compression load of 2000 N/mm<sup>2</sup> before reaching the breaking point, and can be used with specific working pressure up to 1500 N/mm<sup>2</sup>, therefore providing good results to the life of the tool. When you place an order for a punching tool, it is recommended to specify the type of material and thickness that must be punched.

### MATERIAL THICKNESS IN RELATION TO HOLE DIAMETER

Material thickness also plays its part both alone and in relation to the punching diameter. This is particularly valid when the diameter of punched holes is close to the metal sheet thickness value.

A traditional rule says that the diameter of the punch must never be lower than the metal sheet thickness. Nevertheless, with the advent of the hydraulic punching machine, it has become possible to adjust the impact speed between the punch and metal sheet more easily and so partially overcome that rule.

In various cases, although with very great stresses, holes are punched on materials with a thickness higher than the hole diameter.

However, in these conditions there are great stresses and consequently higher wear and the tool life is proportionally lower.

The same great stresses that occur in this case require precautionary measures as well as respect for accident prevention norms, for instance the use of blockages and protections.

On the following pages there are some simple mathematical formulas to calculate the strength.

### ROUNDING OFF AND SMOOTHING

The life of a stamp could be considerably influenced by the shape of the hole to be punched. The geometry that involves sharp corners is less favourable by nature. Wherever possible, it is necessary to smooth or round off these sharp corners. In the cases of square or rectangular holes, providing a 0,3-0,5 mm minimum round off greatly helps the life of the tool.

### THE MACHINE OPERATOR, THE MOST IMPORTANT FACTOR

Even with all of the constructive devices on the front of the tools and machines, the machine operator probably remains the most important factor in considering the life of the stamp. In fact, he directly controls various factors not noticeable in other ways.

The correct use of a punching machine is a task which requires experience: first of all, the machine operator must be familiar with the machine, and be informed on the previous points and related operations.

Punching operations are developed, as seen, with extremely high specific pressures and stresses, so that the safety of the machine and the operator must be appropriately considered in respect to regulations in force, but also without forgetting to use the measures that are requested by particular environmental conditions not foreseen by legislation.



# CLEARANCE CALCULATION AND CONTROL

The clearance value between punch and die affects not only the life of these two components, but also the surface evenness of the sheared piece. In practice, clearance is fixed in accordance with the material thickness as well as its nature.

A correct clearance produces (on a mild steel sheet) holes in which the upper third of the height is cylindrical and properly sheared, while the lower two thirds are lightly conical and show tear signs.

An inadequate clearance produces instead a secondary shearing effect which means additional wear on the punch.

As previously said, the lack of lubrication contributes to a progressive spontaneous increase of the punch diameter and therefore to a likewise progressive and spontaneous clearance reduction.

However, an excessive clearance produces holes with intermediate tear zone and, as a whole, a great loss of evenness on the surface.

Quoted below is a table for die clearance percentage calculations with regards the thickness and common types of material to be worked.

It is a table based on our own and our customers' experiences, in order to obtain the best quality on finished pieces and less wear on tools.

## DIE CLEARANCE RELATED TO MATERIAL THICKNESS

Material	Thickness Range	Minimum or Blanking*	Standard	Maximum
Aluminium Copper Brass 20÷25% Kg/mm <sup>2</sup>	Up to mm 2	8%	10%	12%
	From mm 2 to mm 4	10%	12%	15%
	Over mm 4	12%	15%	20%
Mild Steel 30÷40% Kg/mm <sup>2</sup>	Up to mm 2,5	15%	18%	20%
	From mm 2,5 to mm 5	18%	22%	25%
	Over mm 5	20%	25%	30%
Stainless Steel 60÷80% Kg/mm <sup>2</sup>	Up to mm 1,5	15%	20%	22%
	From mm 1,5 to mm 3	18%	22%	25%
	Over mm 3	20%	25%	28%

\* Blanking: when the scrap is the requested part.

# PUNCHING STRAIN AND RELATED CALCULATIONS

TONNAGE GENERAL FORMULA		Material	Material K	
$\frac{P \times S \times K}{28,3}$	P	Punch Perimeter	Aluminium	0,6
	S	Material Thickness	Copper	0,6
	K	Material Coefficient	Brass	0,6
			Mild Steel	1
			Stainless Steel	1,5
<b>EXAMPLE:</b>	$\frac{40 \text{ (perimeter of a square with mm 10 side)} \times 2 \text{ (material thickness in mm)} \times 1,5 \text{ (Stainless Steel K)}}{28,3}$		<b>= 4,24 (tonnage)</b>	


## WHISPER SHARPENING USE AND BENEFITS

With whisper sharpening we mean the various geometry of the punch upper face that are made only upon request. Sharpening benefits are:

- Tonnage reduction
- Scrap reclaiming reduction
- Ease of extraction
- Noise reduction
- Vibrations and counterblow reduction on all components of the machine


### DWP

Double positive whisper: for high thickness and balanced load.




### DWNT

Concave double negative whisper: for thin thickness and big punch shape nibbling.




### WNT

Concave negative whisper: for thin thickness and small punch shape nibbling.



### WN

Negative whisper: high thickness and stiff and fast machines (the inclined sharpening tends to shift the sheet).



Quoted below is an illustrative table showing tonnage reduction where we consider standard depth DWP sharpening.

Material Thickness in mm	1	1,5	2	2,5	3	4	5	6
% Tonnage reduction	60	50	40	35	25	20	15	10

## SURFACE COATINGS USE AND BENEFITS

All tools (punches) could be coated on the surface to improve their working characteristics. The coating thickness, from 0,002 mm to 0,005 mm, adheres to punch surface by a PVD (Physical Vapour Deposition) processing and gives the surface a considerably greater hardness, and also a lubricating ability. It is a really effective barrier between tool and metal sheet. MATRIX uses TiAlN (Titanium-Aluminium nitride) as coating.

This coating has a brown-black colouring, and gives the punch a higher superficial hardness up to four times the initial one and it is resistant to high temperature, near 900°C.

The damping factor has a factor equal to 0,31. With these characteristics it is recommended for high speed (500÷1000 stroke per minute) punching machine users and it is excellent on Stainless Steel processing.

Coatings are on customer demand only, and are priced separately.

## PROCESSING ON DEMAND

### Radius on corners of the punches

Radius on square and rectangular corners of the punches (specify radius) increases the life of the punch and drastically reduces dies breaking near corners.

### Whisper

Whisper punches: variable price increase (request quotation) depending on whisper type (see previous page) and punch dimensions.

### Large punch rake (SPM)

It is recommended on material thicknesses over mm 4, where it helps punch reclimbing or punch extraction from metal sheet.

### Coatings











































Anti-wear coating available. We recommend coatings on nibbling or punching processing on seizing materials like Stainless Steel or alloys, or on any material high thicknesses.

### Stiffened dies



















On high material thicknesses or critical shapes we suggest stiffened dies which are suited to stand high compression.

Our Technical Office is at your disposal for any possible explanations, advice on better usage, feasibility and cheapness of special processing and their applications.

# SHAPES CODING


					
<b>A0A</b>	<b>A0B</b>	<b>A0C</b>	<b>A0D</b>	<b>A01</b>	<b>A02</b>
					
<b>A03</b>	<b>A04</b>	<b>A05</b>	<b>A06</b>	<b>B01</b>	<b>B02</b>
					
<b>B03</b>	<b>B04</b>	<b>B05</b>	<b>B06</b>	<b>C01</b>	<b>C02</b>
					
<b>C03</b>	<b>C04</b>	<b>C05</b>	<b>C06</b>	<b>C07</b>	<b>C08</b>
					
<b>C09</b>	<b>C10</b>	<b>C11</b>	<b>C12</b>	<b>C13</b>	<b>C14</b>
					
<b>C15</b>	<b>C16</b>	<b>D01</b>	<b>D02</b>	<b>D03</b>	<b>D04</b>
					
<b>D05</b>	<b>D06</b>	<b>E01</b>	<b>E02</b>	<b>E03</b>	<b>E04</b>

# SHAPES CODING

					
<b>E05</b>	<b>E06</b>	<b>F01</b>	<b>F02</b>	<b>G01</b>	<b>H01</b>
					
<b>H02</b>	<b>H03</b>	<b>H04</b>	<b>H05</b>	<b>H06</b>	<b>H07</b>
					
<b>H08</b>	<b>H09</b>	<b>H10</b>	<b>H11</b>	<b>H12</b>	<b>H13</b>


# ANGLE SETTINGS

The diagram that follows is illustrative of angle settings

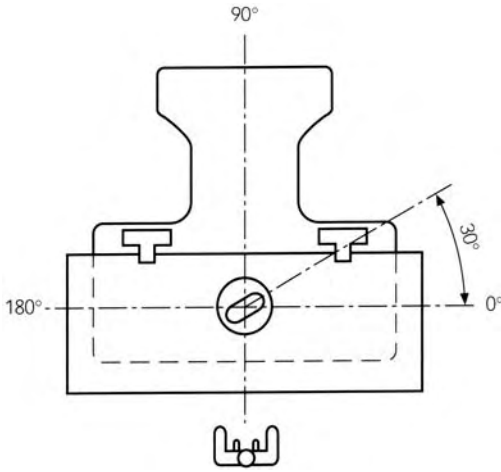

Top view of punch press

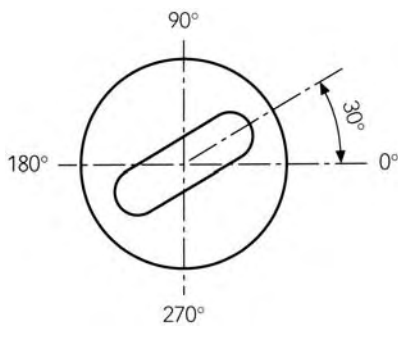**Attention:** in case of order please specify the position of the references placed on the die housing of the machine (not only the shape orientation respect the die).



30° shape example



# PRODUCTS



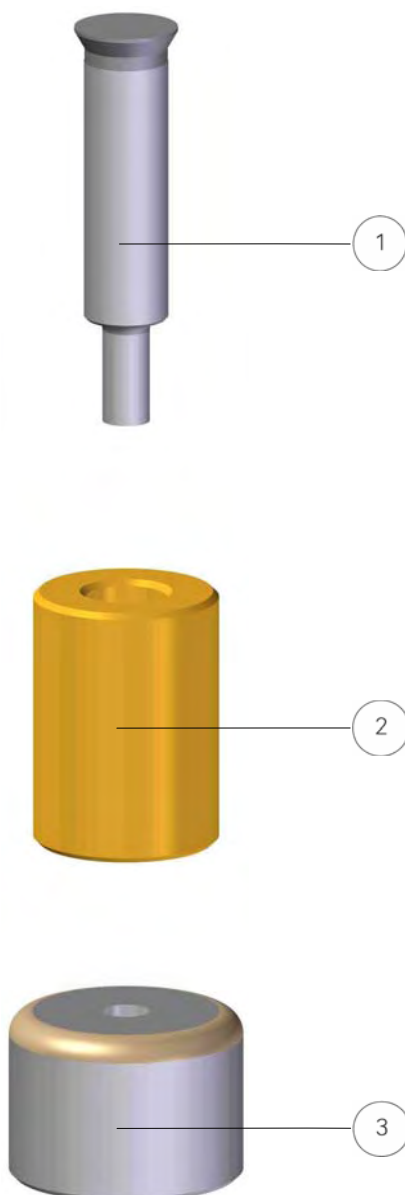
## MURATA WIEDEMANN® - SERIES 114

A STATION

MAX



= mm 12,7



POS.	CODE DESCRIPTION	PRICE
1	F6470000 Round Punch	
2a	F6474000 Polyurethane Stripper - Without Hole	
2b	F647U000 Polyurethane Stripper - With Hole	
3	F2802W00 Round Die	

## OPTIONS

	DWP Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variable W, please refer to page 27

## TECHNICAL SPECIFICATION

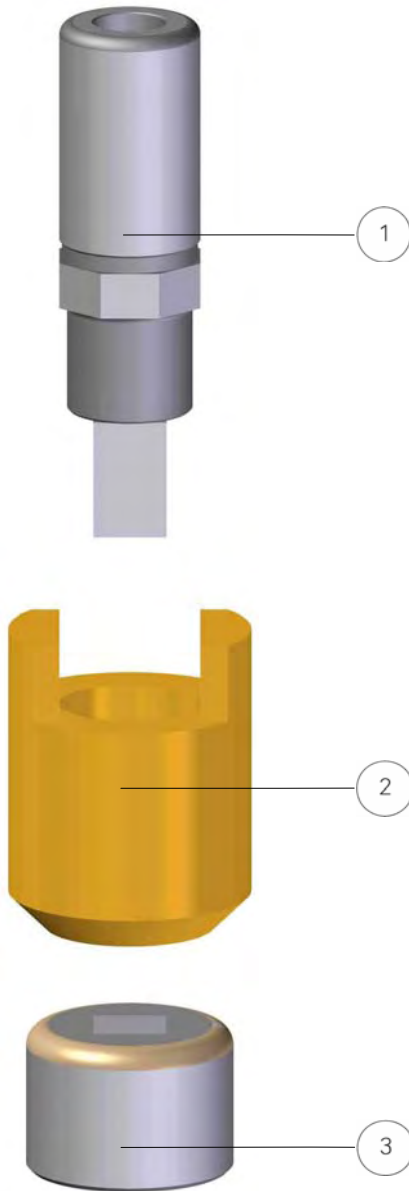
- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.



# MURATA WIEDEMANN® - SERIES 114

B STATION

MAX   = mm 25,4



POS.	CODE DESCRIPTION	PRICE
1a	F2800W00 Round Punch	
1b	F2810W01 Obround Punch	
1c	F2810W02 Square Punch	
1d	F2810W03 Rectangular Punch	
2a	F2804000 Polyurethane Stripper - Without Hole	
2b	F280U0XX Polyurethane Stripper - With Hole	
3a	F2802W00 Round Die	
3b	F2812W01 Obround Die	
3c	F2812W02 Square Die	
3d	F2812W03 Rectangular Die	

### OPTIONS



	Punches with Rotated Shape	
	Strippers with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

### TECHNICAL SPECIFICATIONS

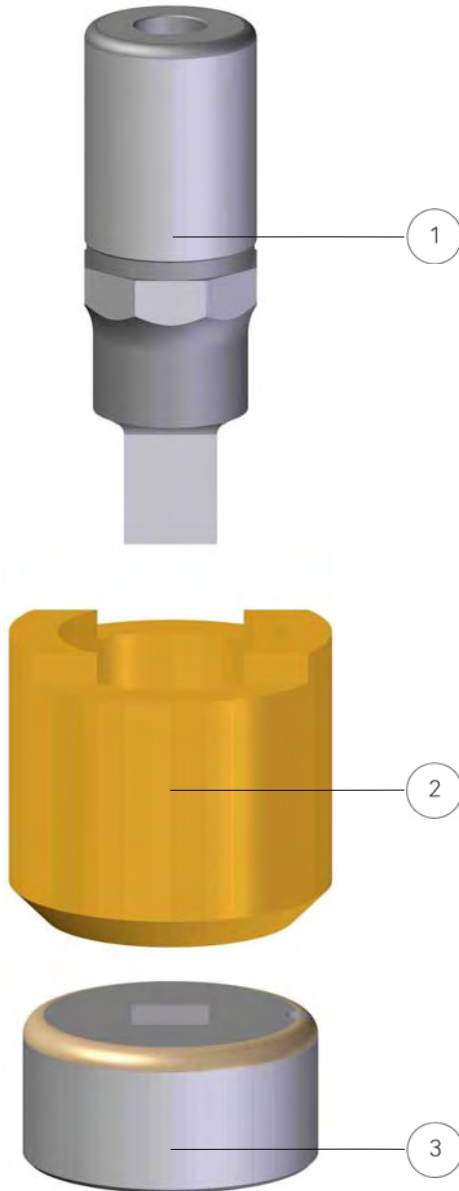
- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.

### DIES REFERENCES

	Square Die
	Obround and Rectangular Dies

## MURATA WIEDEMANN® - SERIES 114

C STATION

MAX  $\varnothing$   $\square$  = mm 38,1

POS.	CODE DESCRIPTION	PRICE
1a	F2820W00 Round Punch	
1b	F2830W01 Obround Punch	
1c	F2830W02 Square Punch	
1d	F2830W03 Rectangulare Punch	
2a	F2824000 Polyurethane Stripper - Without Hole	
2b	F282U0XX Polyurethane Stripper - With Hole	
3a	F2822W00 Round Die	
3b	F2832W01 Obround Die	
3c	F2832W02 Square Die	
3d	F2832W03 Rectangular Die	

## OPTIONS

	Punches with Rotated Shape	
	Strippers with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

## TECHNICAL SPECIFICATIONS

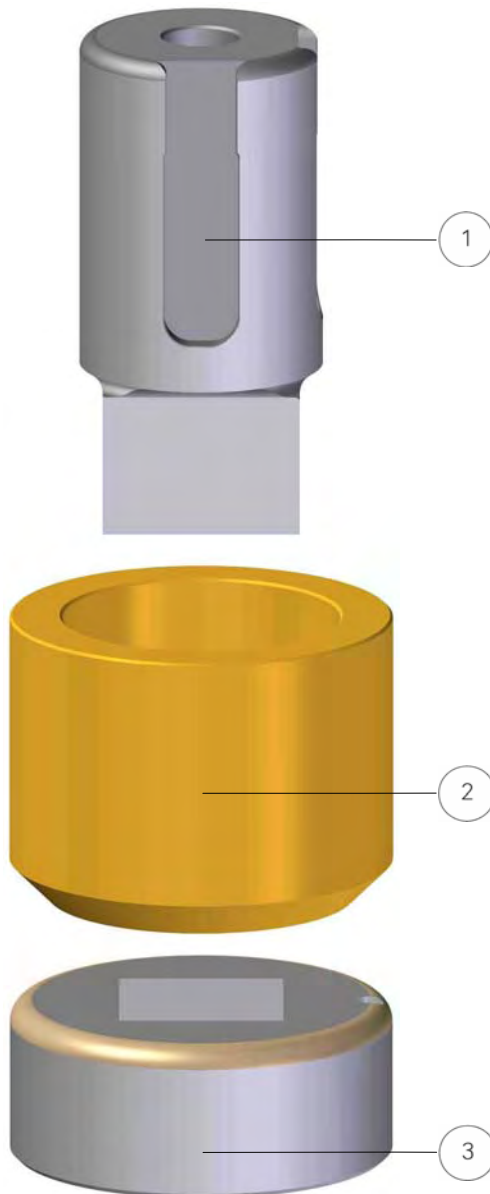
- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.

## DIES REFERENCES

	Square Die
	Obround and Rectangular Dies

## MURATA WIEDEMANN® - SERIES 114

D STATION

MAX   = mm 50,8

POS.	CODE DESCRIPTION	PRICE
1a	F2840W00 Round Punch	
1b	F2860W01 Obround Punch	
1c	F2850W02 Square Punch	
1d	F2860W03 Rectangular Punch	
2a	F2844000 Polyurethane Stripper - Without Hole	
2b	F284U0XX Polyurethane Stripper - With Hole	
3a	F2842W00 Round Die	
3b	F2862W01 Obround Die	
3c	F2862W02 Square Die	
3d	F2862W03 Rectangular Die	

## OPTIONS



	Punches with Rotated Shape	
	Strippers with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

## TECHNICAL SPECIFICATIONS

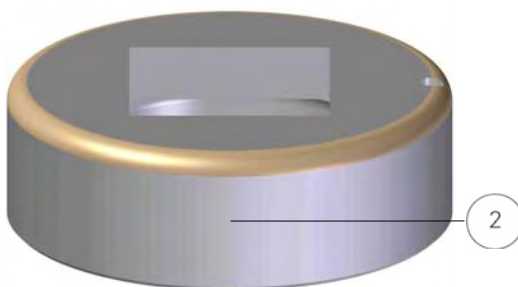
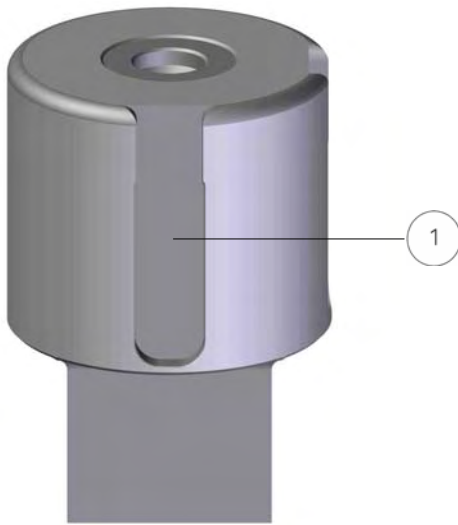
- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.

## DIES REFERENCES

	Square Die
	Obround and Rectangular Dies

## MURATA WIEDEMANN® - SERIES 114

E STATION

MAX   = mm 63,5

POS.	CODE DESCRIPTION	PRICE
1a	F2870W00 Round Punch	
1b	F2890W01 Obround Punch	
1c	F2880W02 Square Punch	
1d	F2890W03 Rectangular Punch	
	F2874000 Polyurethane Stripper - Without Hole	
	F287U0XX Polyurethane Stripper - With Hole	
2a	F2872W00 Round Die	
2b	F2892W01 Obround Die	
2c	F2892W02 Square Die	
2d	F2892W03 Rectangular Die	

## OPTIONS



	Punches with Rotated Shape	
	Strippers with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

## TECHNICAL SPECIFICATIONS

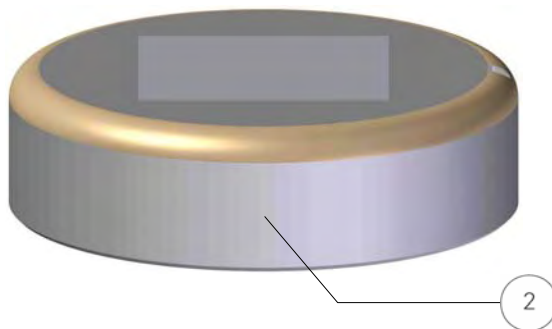
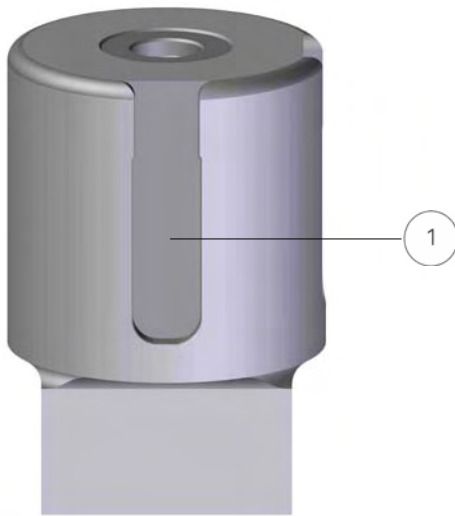
- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.

## DIES REFERENCES

	Square Die
	Obround and Rectangular Dies

## MURATA WIEDEMANN® - SERIES 114

F STATION

MAX   = mm 76,2

POS.	CODE DESCRIPTION	PRICE
1a	F2900W00 Round Punch	
1b	F2920W01 Obround Punch	
1c	F2910W02 Square Punch	
1d	F2920W03 Rectangular Punch	
	F2904000 Polyurethane Stripper - Without Hole	
	F290U0XX Polyurethane Stripper - With Hole	
2a	F2902000 Round Die	
2b	F2922W01 Obround Die	
2c	F2922W02 Square Die	
2d	F2922W03 Rectangular Die	

## OPTIONS



	Punches with Rotated Shape	
	Strippers with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

## TECHNICAL SPECIFICATIONS

- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.

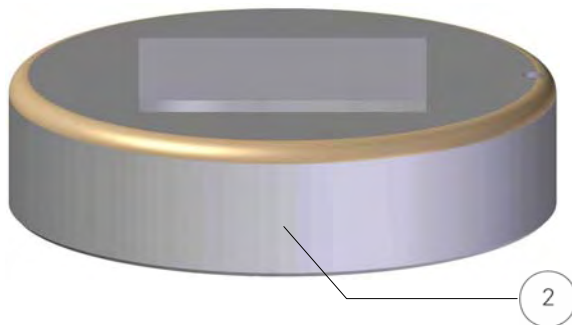
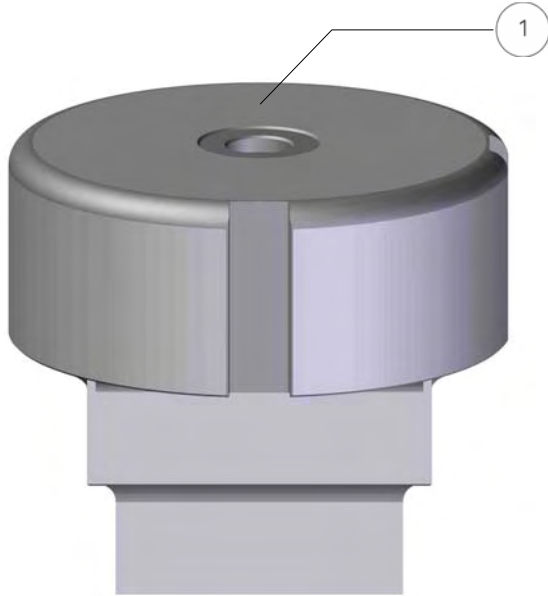
## DIES REFERENCES

	Square Die
	Obround and Rectangular Dies

# MURATA WIEDEMANN® - SERIES 114

G STATION

MAX   = mm 88,9



POS.	CODE DESCRIPTION	PRICE
1a	F2930W00 Round Punch	
1b	F2950W01 Obround Punch	
1c	F2940W02 Square Punch	
1d	F2950W03 Rectangular Punch	
2a	F2932W00 Round Die	
2b	F2952W01 Obround Die	
2c	F2952W02 Square Die	
2d	F2952W03 Rectangular Die	



OPTIONS		
	Punches with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

### TECHNICAL SPECIFICATIONS

- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.

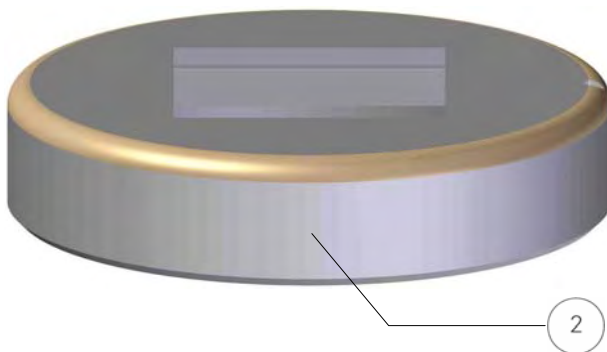
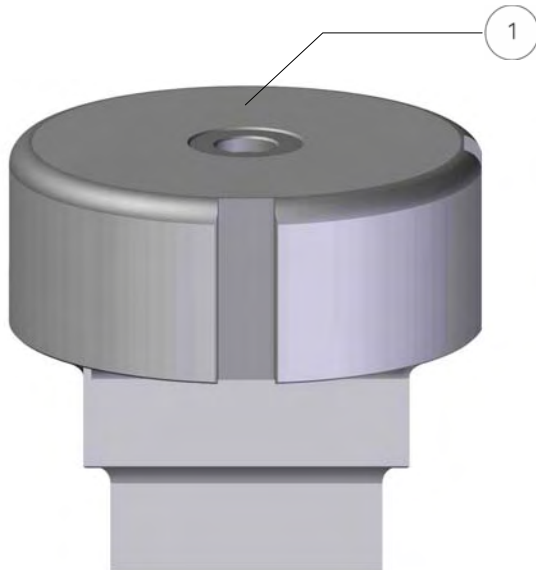
### DIES REFERENCES

	Square Die
	Obround and Rectangular Dies



## MURATA WIEDEMANN® - SERIES 114

H STATION

MAX   = mm 104,8

POS.	CODE DESCRIPTION	PRICE
1a	F2960W00 Round Punch	
1b	F2980W01 Obround Punch	
1c	F2970W02 Square Punch	
1d	F2980W03 Rectangular Punch	
2a	F2962W00 Round Die	
2b	F2982W01 Obround Die	
2c	F2982W02 Square Die	
2d	F2982W03 Rectangular Die	

## OPTIONS



	Punches with Rotated Shape	
	Dies with Rotated Shape	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Punches with small dimensions shapes (lower than mm 4,00)	

To know meaning of variables XX and W, please refer to page 27

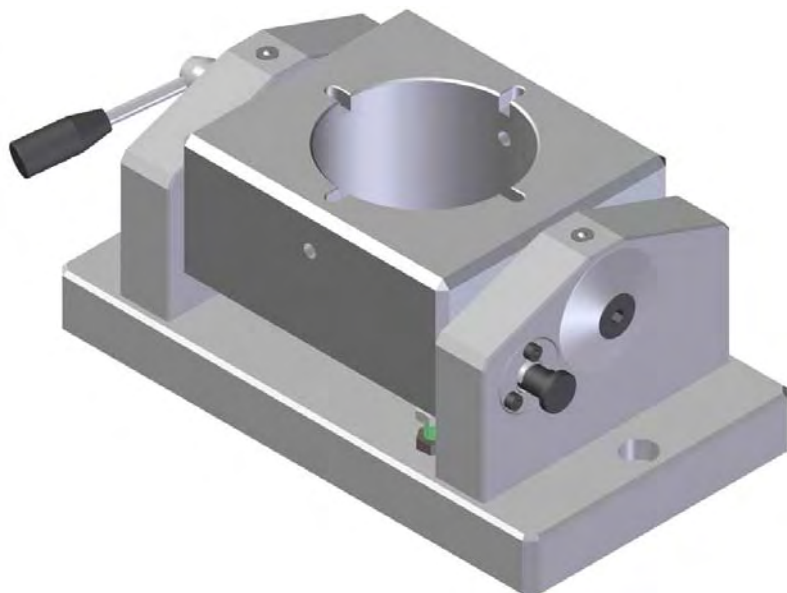
## TECHNICAL SPECIFICATIONS

- All dies are manufactured with slug retention system, except for measures lower or equal to mm 2 or clearances lower or equal to mm 0,13.
- Whisper punches, besides reducing noise of a 50%, requires an inferior shearing strength. They are particularly indicated for strong materials and plastics.
- Surface coating on punches available on demand.


## DIES REFERENCES

	Square Die
	Obround and Rectangular Dies


# SHEAR GRINDING FIXTURE




CODE DESCRIPTION	PRICE
FA22QE00 Reclining Universal Base	
<b>TECHNICAL SPECIFICATIONS</b>	
<ul style="list-style-type: none"> <li>The sharpening of tools often is a problem, especially when the tools have a single inclined cutting part or even a double inclined cutting part (see whisper sharpening).</li> <li>This fixture solves the problem by allowing to execute all kind of sharpening in an easy and fast way: when it is clamped on grinding machine, it accepts all adaptors showed in this page and in the following one.</li> <li>To be able to use the adaptor FAB0QF00 it is necessary to combine it with adaptor FAB0QG00.</li> <li>This element is used on 0° position for plan punches and dies, or with a maximum <math>\pm 20^\circ</math> inclination for whisper punches.</li> </ul>	




CODE DESCRIPTION	PRICE
FAB0QF00 Punch Adaptor - Series 114 A Station	



CODE DESCRIPTION	PRICE
FAB0QG00 Punch and Die Adaptor - Series 114 B Station	




CODE DESCRIPTION	PRICE
FAB0QH00 Punch and Die Adaptor - Series 114 C Station	




CODE DESCRIPTION	PRICE
FAB0QI00 Punch and Die Adaptor - Series 114 D Station	




# SHEAR GRINDING FIXTURE




CODE DESCRIPTION	PRICE
FAB0QJ00 Punch and Die Adaptor - Series 114 E Station	



CODE DESCRIPTION	PRICE
FAB0QK00 Punch and Die Adaptor - Series 114 F Station	



CODE DESCRIPTION	PRICE
FAB0QL00 Punch and Die Adaptor - Series 114 G Station	



CODE DESCRIPTION	PRICE
FAB0QM00 Punch and Die Adaptor - Series 114 H Station	

# TOOL HOLDER CART



POS.	CODE DESCRIPTION	PRICE
1	F680WQ00 Tool Holder Cart	

## TECHNICAL SPECIFICATIONS

- Tool Holder cart on four wheels, with dimensions mm 745 x 475, height mm 1098, composed of:
  - 7 compartments of which: 5 with internal height mm 76, 1 of mm 150 and 1 of mm 120;
  - Support plan with anti-slip rubber.
  - The picture is purely indicative: colours and shape of the tool holder cart can vary at our company's discretion.

# TOOLS

							
NEBULIZER		OILER		GREASE		ABRASIVE STONE	
A3708433.421		A4108544.422		A1808629.425		A2907545.423	
Pneumatic spray with two nozzles, for economic and clean lubrication of sheet metal.		Spray oil can, capacity 0,35 liters.		Grease resistant to high temperatures, ideal for all sliding surfaces such as punches, holders and turrets.		Abrasive stone for shining and reviving corners.	
							
CALIBRE		A4608342.419		SNIPE		A3908241.417	
Slider calibre with mm and inch scale.				Long nose snipe, length mm 47.			
							
HAMMER		A4508140.416		FILE		A2907543.420	
Plastic hammer with anti sliver and anti wearing urethane plugs.				Diamond needle file, for removal or maintenance.			
							
DEMAGNETIZER		A4700000.424					
220 Volt Frequency 50 Hz, for demagnetizing all punching tools and components.							

**Note:** The actual look of these tools might vary according to market availability.



# TOOLS CODING

In order to give to customers a quick and efficient service each tool feature has been coded, to allow the final user a fast identification means for the correct tool.

Here as following some examples of the most commonly used codes.

## Tool Shape (XX)

00 - Round  
 01 - Obround  
 02 - Square  
 03 - Rectangular  
 A1 - Special Shape A01  
 A2 - Special Shape A02  
 A3 - Special Shape A03  
 A4 - Special Shape A04  
 A5 - Special Shape A05  
 A6 - Special Shape A06  
 B1 - Special Shape B01  
 B2 - Special Shape B02  
 B3 - Special Shape B03  
 B4 - Special Shape B04  
 B5 - Special Shape B05  
 B6 - Special Shape B06  
 C1 - Special Shape C01  
 C2 - Special Shape C02  
 C3 - Special Shape C03  
 C4 - Special Shape C04  
 C5 - Special Shape C05  
 C6 - Special Shape C06  
 C7 - Special Shape C07  
 C8 - Special Shape C08  
 C9 - Special Shape C09  
 CA - Special Shape C10  
 CB - Special Shape C11  
 CC - Special Shape C12  
 CD - Special Shape C13  
 CE - Special Shape C14  
 CF - Special Shape C15  
 CG - Special Shape C16  
 D1 - Special Shape D01  
 D2 - Special Shape D02  
 D3 - Special Shape D03  
 D4 - Special Shape D04  
 D5 - Special Shape D05  
 D6 - Special Shape D06  
 E1 - Special Shape E01  
 E2 - Special Shape E02  
 E3 - Special Shape E03  
 E4 - Special Shape E04  
 F1 - Special Shape F01  
 F2 - Special Shape F02  
 G1 - Special Shape G01  
 H1 - Special Shape H01  
 H2 - Special Shape H02  
 H3 - Special Shape H03  
 H4 - Special Shape H04  
 H5 - Special Shape H05  
 H6 - Special Shape H06  
 H7 - Special Shape H07  
 H8 - Special Shape H08  
 H9 - Special Shape H09  
 HA - Special Shape H10  
 HB - Special Shape H11  
 HC - Special Shape H12  
 HD - Special Shape H13

## Tool Dimensions (YYY)

This three digit code univocally identifies tool dimensions, if it is a punch, a die or a stripper.

Example:

000 - 3  
 001 - 3,5  
 002 - 4  
 003 - 4,5  
 004 - 5  
 ...

## Tool Groups (W)

In some cases inside a tool typology it is possible to find various groups, meaning measures sets, which are identified through this variable.

Example:

B0 - Punch, 1<sup>st</sup> Group, "A" Coating  
 B1 - Punch, 2<sup>nd</sup> Group, "A" Coating  
 B2 - Punch, 3<sup>rd</sup> Group, "A" Coating  
 B3 - Punch, 4<sup>th</sup> Group, "A" Coating  
 B4 - Punch, 5<sup>th</sup> Group, "A" Coating

## Tool Features (ZZ)

00 - Punch  
 20 - Die  
 40 - Stripper  
 60 - Punch Guide  
 63 - Die Adaptor  
 68 - Punch Adaptor  
 72 - Adjustable Guide Assembly  
 AF - Punch Guide  
 AR - Die Holder  
 B0 - Punch, "A"  
 C0 - Punch, "B"  
 D0 - Punch, "A" Coating, DWP  
 E0 - Punch, "B" Coating, DWP  
 F0 - Punch, "A" Coating, DWNT  
 G0 - Punch, "B" Coating, DWNT  
 H0 - Punch, "A" Coating, WN  
 I0 - Punch, "B" Coating, WN  
 J0 - Punch, "A" Coating, WNT  
 K0 - Punch, "B" Coating, WNT  
 L0 - Punch DWP  
 M0 - Punch DWNT  
 N0 - Punch WN  
 P0 - Punch WNT  
 Q0 - Punch Extended  
 R0 - Punch, Measures under mm 4  
 BA - Complete Upper Insert Holder  
 BB - Complete Lower Insert Holder  
 DY - Basic Set  
 GS - Starting Set  
 LX - Punch Holder Set

# COMPANY PROFILE

We produce tooling for

Punch Presses cnc	Iron Workers
AMADA	FICEP
FINN-POWER	GEKA
LVD	IMS
RAINER	OMERA
TRUMPF	MUBEA
MURATA-WIEDEMANN	PEDDINGHAUS
TECNOLOGY	KINGSLAND
EUROMAC	
SCHIAVI	
IMAC	
DURMA	
HACO	

and more.

#### A DYNAMIC TEAM

Each Matrix product is the result of the cooperation of young and highly qualified technicians who constantly keep themselves abreast and deal with problems and requirements of the production cycle.

#### THE CUSTOMER, A UNIQUE AND UNREPEATABLE PARTNER

We are convinced that every customer deserves special care. For this reason Matrix does not offer just a product, but also technical support and an advice service which aim is to obtain mutual satisfaction.

#### QUALITY TOOLS FOR EVERY REQUIREMENT

Our design and production are oriented to develop innovative solutions to fulfil different customers' problems, as well as guarantee the highest quality standard in each production processing phase.

#### ENERGIES ORIENTED TO MAXIMUM ACCURACY

To the production unit devoted to traditional mechanical processing has been added a new plant optimized to accomplish high technology content processing. The recent building, innovative in our field, is entirely wired and built with specific features to guarantee the product high quality and accuracy.

#### DIES AND PUNCHES BORN TO LAST

The high reliability and long life which distinguish Matrix' products are the result of experience, devotion, constant research and use of superior quality raw materials.

#### INNOVATIVE TECHNOLOGIES FOR HIGH PERFORMANCES

Matrix invests in the best technologies: from sophisticated software for designing, to computerization of production data. From the scheduling to product tuning and final test.

The trademarks presented in this catalogue - if they are registered - are property of their respective companies.

© 2009



MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy

Tel. +39 0445 671015 - Fax +39 0445 671035

www.matrixtools.eu - info@matrixtools.eu





# MATRIX

Tooling for Punch Presses

**MATRIX S.r.l.**

Via Ponte d'Oro, 8  
36015 Schio · Vicenza · Italy

Tel. +39 0445 671015

Fax +39 0445 671035

[www.matrixtools.eu](http://www.matrixtools.eu)

[info@matrixtools.eu](mailto:info@matrixtools.eu)

COMPANY WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2000 =